


**LED Flood Light
FL-S01-110 series**



**Modular LED Floodlight
FL-S01-110**

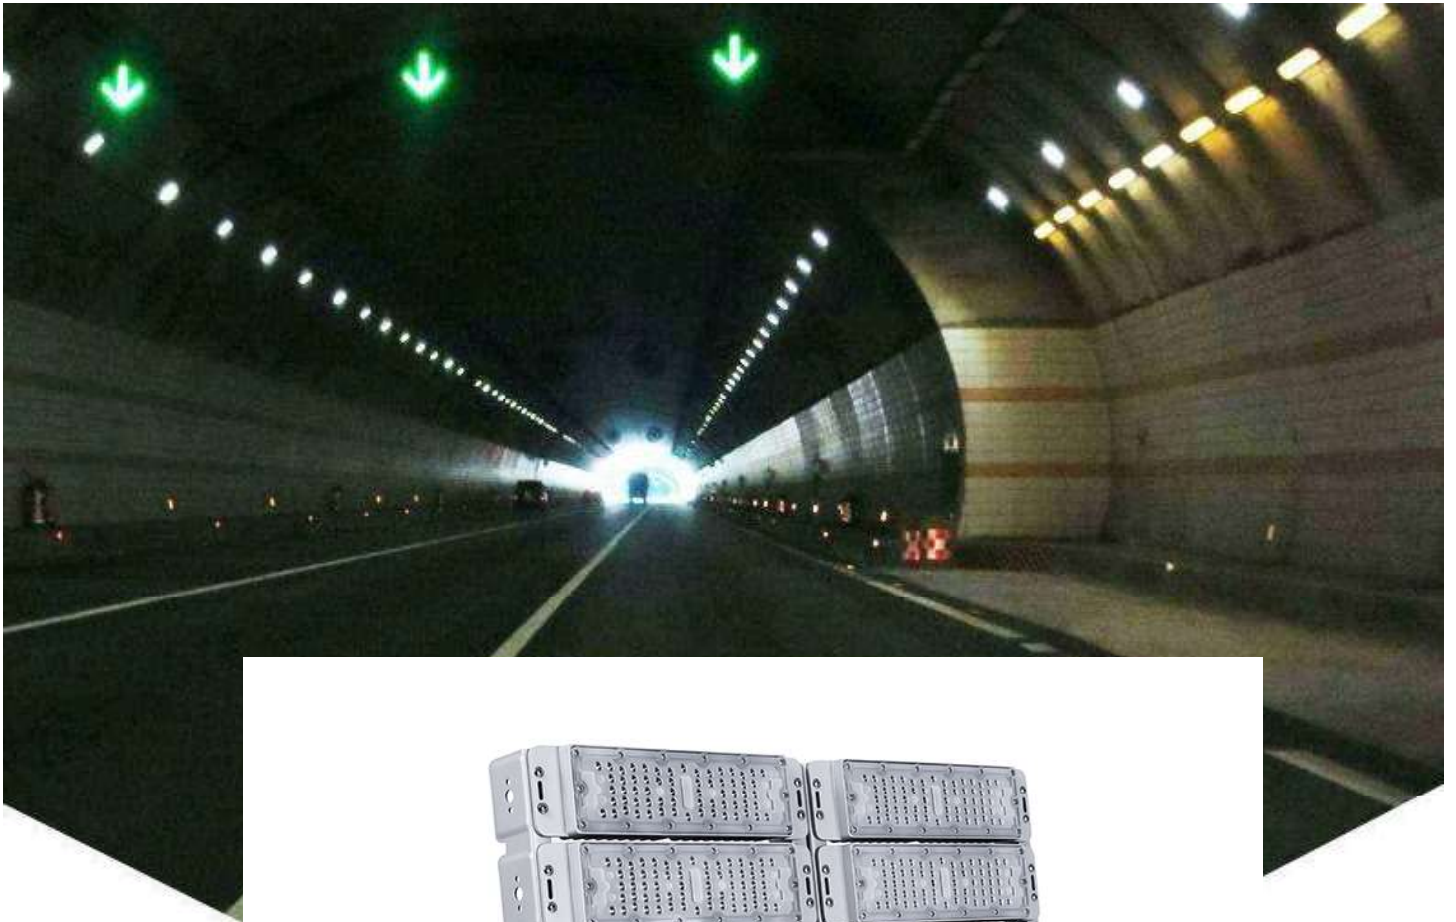

50W



100W



150W



200W



250W



300W



400W




500W



600W



Product Features

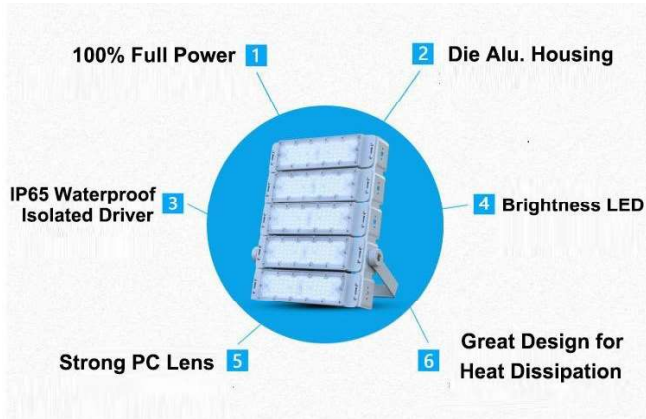

IP65 Weatherproof

Waterproof grade up to IP65
tightly protected against rain infiltration




180° Rotation

Bracket with gear design
Can adjust different angles
easily

Thickness Die Alu. Housing


with more heat sinks in the back side
to guarantee the great heat dissipation

Aluminum thickened shell

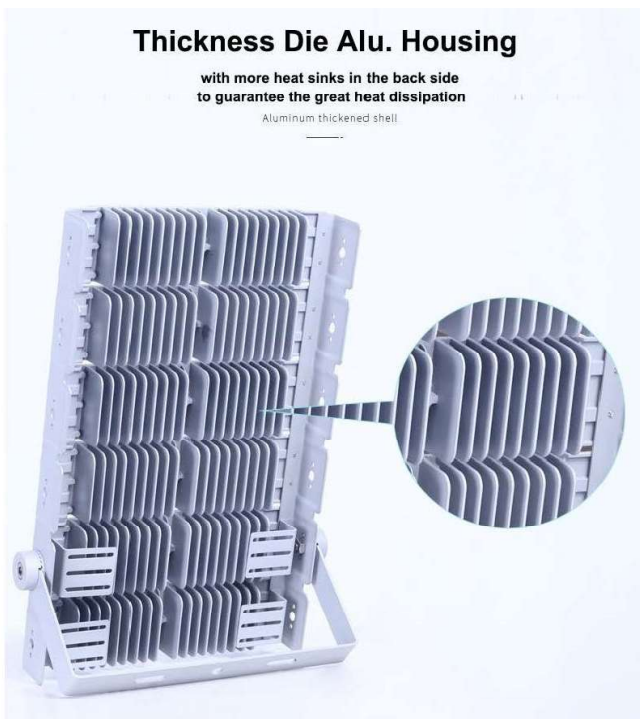

Strong PC Lens

Wide shine angle: 30°-60°-90°

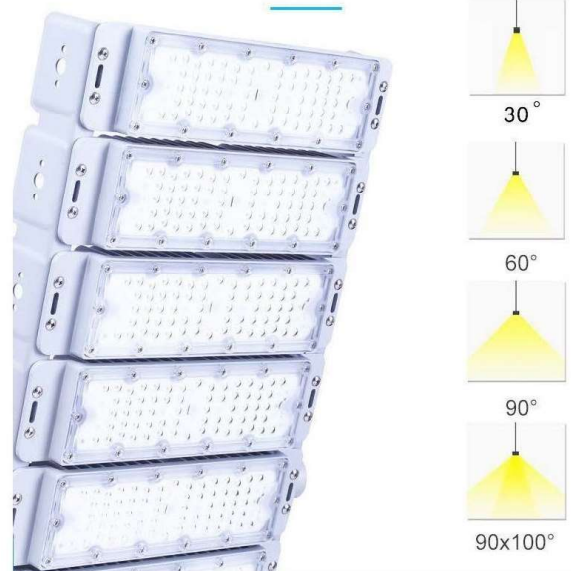

Basic Product Information

Modular LED Floodlight - FL-S01-110

Lamp Power	50W	2X50W	3x50W	4x50W	5X50W	6X50W	8X50W	10X50W	12X50W
Product size(mm)	350x75x75	350x155x75	350x240x75	350x315x75	350x395x75	665x240x75	665x315x75	665x395x75	665x475x75
Material	Die-cast Aluminium+PC Lens								
LED Color	3000-3500K, 4000-4500K, 5000-5500K, 6000-6500K								
Lamp Flux	90-110LM/1W, 120-130LM/1W,								
Shine Angle	30° or 60° or 90°								
IP Grade	IP66								
CRI	Ra>70								
Life Time	50000H								
SPD	2.5KV-4KV-6KV-10KV								
Input Voltage	AC85-305V or AC165-277V								
Body Color	Grey or Black								
Certificate	BIS ,SASO ,CE-LVD-EMC ,RoHs ,IES ,EAC ,ISO9001 ,Intertek ,TIR								

Packing Details

Lamp Power	30W/50W	100W	150W	200W	250W	300W	400W	500W	600W
Packing Size(cm)	36.5*17.5*15	36.5*17.5*15	36.5*26.5*15	36.5*33*15	36.5*41.5*15	67.5*32.5*15	67.5*32.5*15	67.5*41.5*15	67.5*50.5*15
PCS/CTN	1	1	1	1	1	1	1	1	1
CBM/CTN	0.010	0.010	0.015	0.018	0.023	0.033	0.033	0.042	0.051

Typical Applications

