

# AXX

## Explosion proof EXIT Light

# LEIZUR



### Applications:

Widely used for safety exit indication and marking:

- Oil and gas industries
- Chemical, petrochemical
- Pharmaceutical industries
- Marine platforms, chemical tankers
- LNG ships and dangerous cargo wharfs
- Power Generation

### Standard Materials:

- Housing: Die-casting aluminum
- Exterior: Stainless steel
- Globe: Tempered glass
- Gasket: Silicon rubber

### Features:

- Die-cast aluminum body with baked epoxy powder coat finish for durability and corrosion resistance
- Toughened glass transparent cover with high light transmittance
- Ultra-bright LED light source, service life is up to 50,000 hours
- Designed with test buttons, convenient for regularly maintenance
- The light fitting is designed with a main power indicator, failure and charging indicator, to the using status
- Designed with test button




*counts on lumen output.*

## Specifications

<b>Ex Marking</b>	II 2 G Ex db eb IIC T6 Gb II 2 D Ex tb IIIC T80°C Db IP66
<b>Classification</b>	Zone 1, 2 & Zone 21, 22
<b>IP Degree</b>	IP66
<b>Input Voltage</b>	AC220V
<b>Power</b>	3W
<b>Entries</b>	G 3/4" Conduit Entry, Suitable for $\Phi$ 10mm- $\Phi$ 14mm cable
<b>Back-up Battery</b>	>120min
<b>Net Weight</b>	3.25kg

## Mechanical Data & EXIT Signs

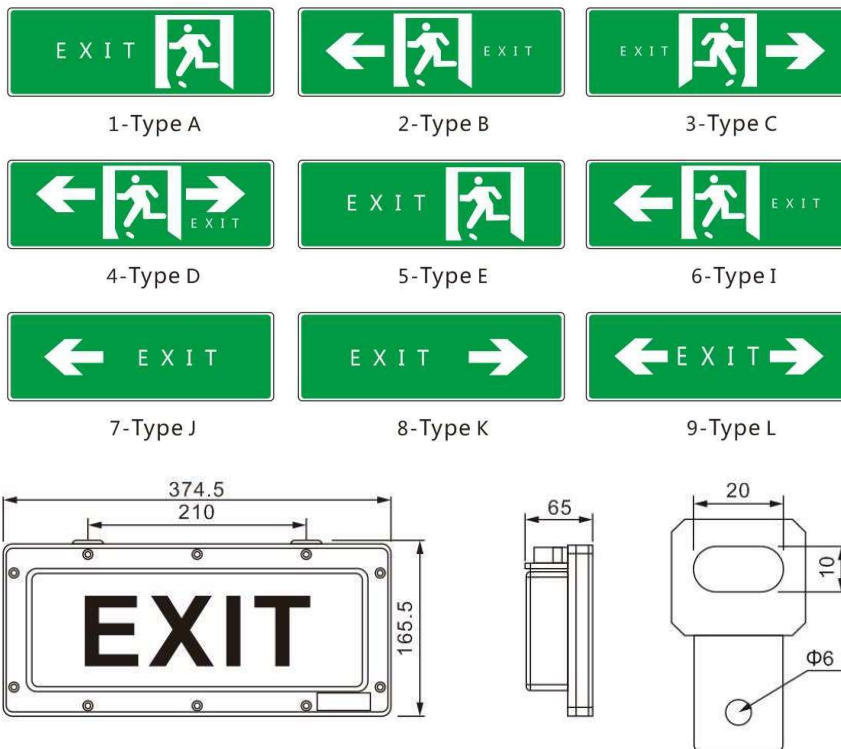

<b>Degree of protection</b>	IP66
<b>Cable entry</b>	G 3/4" ; NPT3/4"
<b>Dimension[mm]</b>	374.5*165.5*65
<b>Weight [kg]</b>	3.25
<b>Terminal</b>	$\leq 2.5 \text{ mm}^2$
<b>Mounting Styles</b>	Ceiling; Wall Bracket; Pendant